Input Condition: Mailbox Input Condition: Mailbox

Input Condition: Mailbox

This subsection covers the following topics:

- Mailboxes
- Using Mailboxes with Input Conditions
- Defining the Input Condition
- Field Descriptions
- Special PF Keys

Mailboxes

Mailboxes are defined to the system and assigned to user IDs by using the System Administrator Services option on the Main Menu. For more information on defining mailboxes, see the Entire Operations Administration Documentation. For more information on how mailboxes can be used, see the section Mailboxes.

Using Mailboxes with Input Conditions

Each logical condition can be assigned to a mailbox.

- If the condition is the **only one** pending (unfulfilled) and is therefore delaying the start of the subsequent job, a message is automatically sent to the mailbox.
- If an input condition is dependent on manual action(s), a message is sent to a mailbox that prompts a user to confirm completion of the action(s).

Each user linked to this mailbox sees this prompt whenever the Main Menu or the Active Jobs screen is invoked. A user can confirm the prompt by setting or resetting the requested condition. The condition will be set, only if a user confirms the condition setting in the mailbox list.

A user can be associated with up to ten mailboxes.

Defining the Input Condition




To send a user prompt to a mailbox for an input condition that is not satisfied during network execution

- 1. In the Master Input Condition Addition / Modification window, enter any character in the Mailbox field under the Depending on heading.
- 2. Press Enter.

The following window opens:

Copyright Software AG 2003

Field Descriptions Input Condition: Mailbox

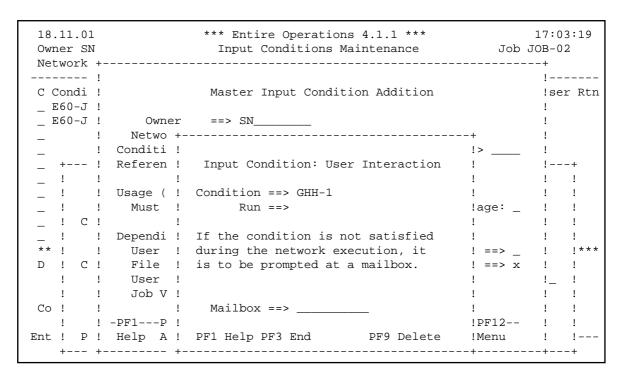

In this window you can enter a mailbox name.

Field Descriptions

The input field has the following meaning:

Field Name	Description
Mailbox	Enter the name of the mailbox to which the prompt is to be sent.

Special PF Keys

You can perform the following function from the Input Condition User Interaction window using this PF key:

Key	Name	Function
PF9	Delete	Delete input condition depending on mailbox.

To list available mailboxes

- 1. Type an asterisk * in the field labelled Mailbox in this window.
- 2. Press Enter.

A window opens listing all mailboxes defined to **Entire Operations**:

Input Condition: Mailbox Special PF Keys

18.11.01	**	* Entire Operations 4.3	1.1	*** 17:04:2	26
Owner SN		Input Conditions M	+		+4
Network +			!		!
!			!		!
C Condi !		Master Input Condit	!		!ser Rtn
_ E60-J !			!	Mailbox Selection	!
_ E60-J !	Owner	==> SN	!		!
_ !	Netwo +-		!	** Top **	!
_ !	Conditi !		!	_ GHH-BOX	!
_ !	Referen !	Input Condition: Use	!	_ DWI-BOX	!
_ !	!		!	_ DWI-BOX-02	!
_ !	Usage (!	Condition ==> GHH-1	!	_ EXPORT-BOX	!
_ !	Must !	Run ==>	!	_ HUGO	!
_ !	!		!	_ WKS-011	!
_ !	Dependi !	If the condition is n	!	_ X10	!
******	User !	during the network ex	!	_ X11	! * * * * * *
D Delet !	File !	is to be prompted at	!	_ X12	!
!	User !		!	_ X13	!
!	Job V !		!		!
Command !	!	Mailbox ==> *	!	PF3PF7PF8	!
!	-PF1P !		!	End Up Down	!
Enter-PF !	Help A!	PF1 Help PF3 End	+		+PF12

- 3. Select a mailbox by typing any character in the appropriate line command input field.
- 4. Press Enter.
- 5. The window closes and the selected mailbox name appears in the Mailbox field of the Master Input Condition Addition / Modification window.
- 6. When finished, press PF3 (End) to save data and return to the Master Input Condition Addition / Modification window.

Copyright Software AG 2003 3